




Importação / Distribuição / Assistência Técnica
Nunes Oliveira
TEL.: (11) 3382-0600
www.nunesoliveira.com.br
diretoria@nunesoliveira



IN LINE CABLE CUTTERS ES32LX

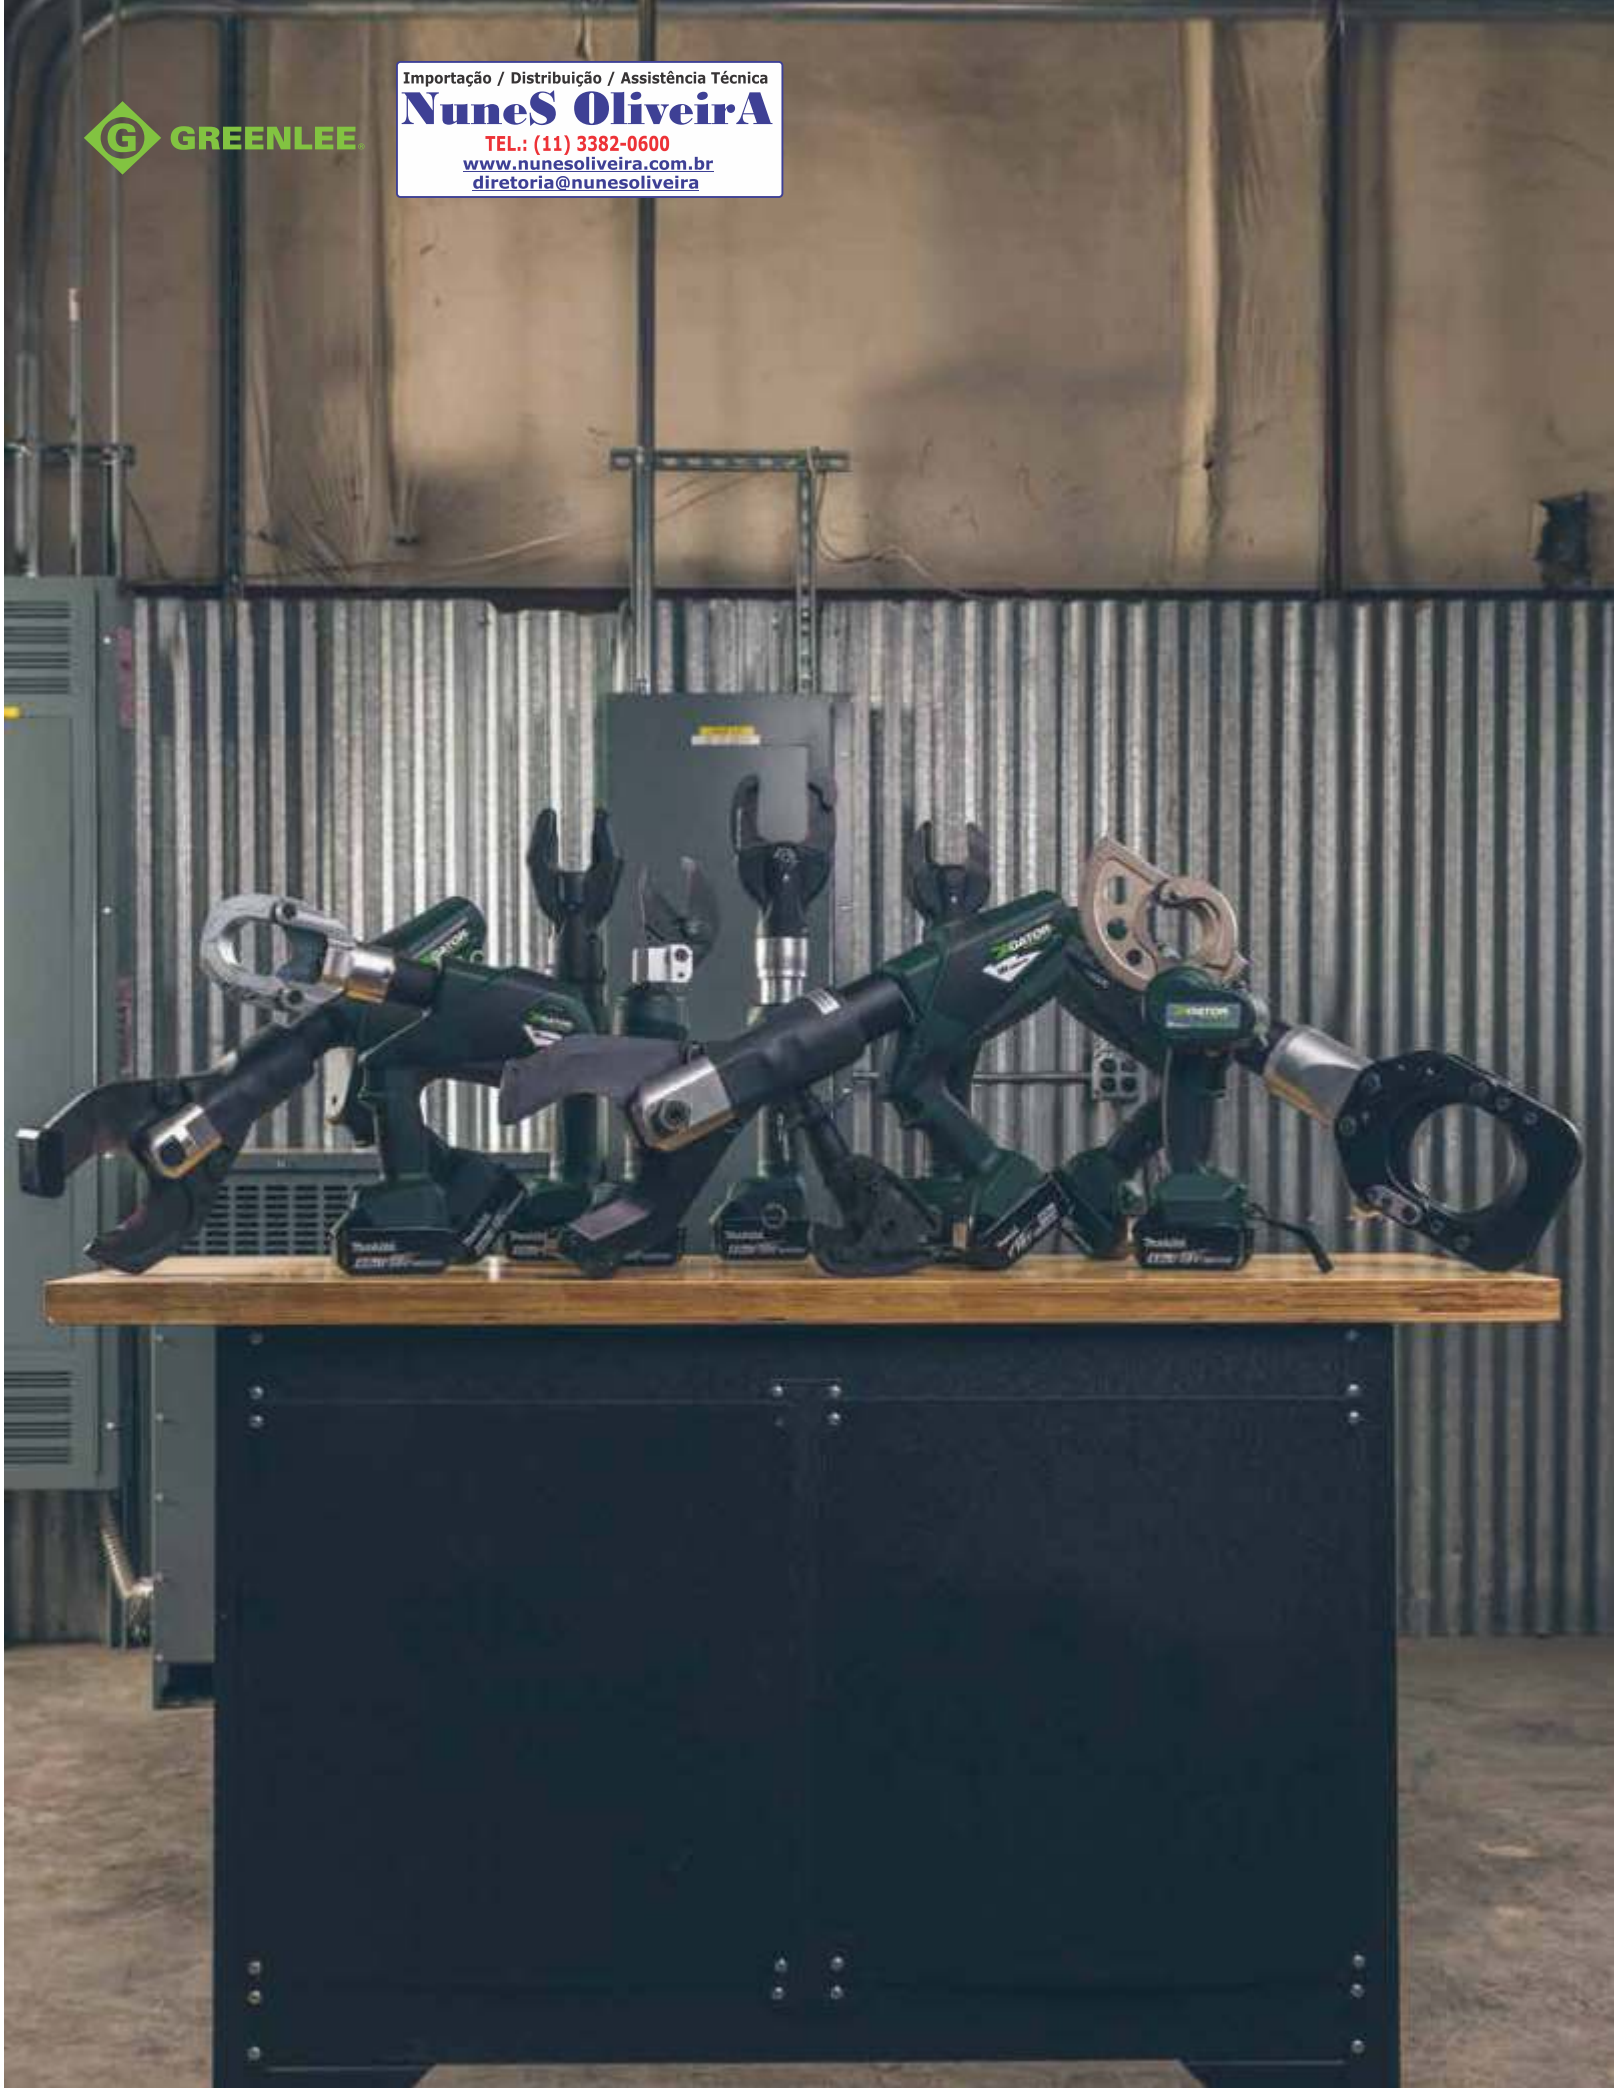

ES32LX



COPPER/ALUMINIUM CUTTER

- Small size makes the ES32LX an excellent tool for use inside panel boxes
- In line tool style is light weight and very easy to control
- One trigger controls all tool functions
- Tools automatically retract when the cutting cycle is complete
- Head rotates 350°

SPECIFICATIONS

Height	15-1/2" (394 mm)
Width	2-7/8" (73 mm)
Weight	5 lb (2.2 kg)
Capacity	600 kcmil (304 mm) Cu or Al cable

ES32LX

CAT NO.	UPC NO.	DESCRIPTION
ES32LX11	783310611943	32 mm Soft Metal Cable Cutter, 120V Charger, Two 2.0 Ah Batteries
ES32LX12	783310611950	32 mm Soft Metal Cable Cutter, 12V Charger, Two 2.0 Ah Batteries
ES32LX22	783310611967	32 mm Soft Metal Cable Cutter, 230V Charger, Two 2.0 Ah Batteries
B ES32LXB	783310611998	32 mm Soft Metal Cable Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 05167	783310051671	18V 4.0Ah Li-ion Battery
A 52177	783310521778	18V 2.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
R HE.10314	783310120926	Movable Blade
R HE.10315	783310120933	Fixed Blade
A 12274	783310122746	Carrying Strap

Importação / Distribuição

Nunes Oliveira

 Máquinas e Ferramentas para Saneamento,
Indústria, Construção, Óleo e Gás

TEL.: (11) 3382-0600
www.nunesoliveira.com.br
contato@nunesoliveira.com.br

 Rua do Bosque, 383/387 - Cep 01136-000
Barra Funda - São Paulo - SP

FABRICANTE:


GREENLEE®

IN LINE CABLE CUTTER

ESC35LX, ESC50LX

- Cutting head rotates 350°
- Tool automatically retracts when the cutting cycle is complete
- Overmolded tacky grip area make gripping the tool easier and more comfortable
- Retraction stop feature reduces time between cuts on smaller wire sizes

NEW



ESC35LX

ESC50LX

SPECIFICATIONS

	ESC35LX	ESC50LX
Height	18" (457 mm)	21" (533 mm)
Width	3" (76 mm)	3" (76 mm)
Length	4.5" (114 mm)	4.5" (114 mm)
Weight	6.6 lb (3 kg)	7.2 lb (3.25 kg)
Capacity	Cuts up to 1.38" diameter Copper (Cu) and Aluminum (Al) Standard/ Fine Stranded Cable	Cuts up to 2" diameter Copper (Cu)/ Aluminum (Al) Standard and Fine Stranded Cable

ESC35LX

CAT NO.	UPC NO.	DESCRIPTION
ESC35LX11	783310613350	35 mm Soft Metal Cable Cutter, 120V Charger, Two 2.0 Ah Batteries
ESC35LX12	783310613367	35 mm Soft Metal Cable Cutter, 12V Charger, Two 2.0 Ah Batteries
ESC35LX22	783310613374	35 mm Soft Metal Cable Cutter, 230V Charger, Two 2.0 Ah Batteries

ESC50LX

CAT NO.	UPC NO.	DESCRIPTION
ESC50LX11	783310080060	50 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Batteries
ESC50LX12	783310080077	50 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Batteries
ESC50LX22	783310080107	50 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Batteries
ESC50LXB	783310080053	50 mm Soft Metal Cable Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
ES35E	783310071891	Cutting Blade (2)
05167	783310051671	18V 4.0Ah Li-ion Battery
52178	783310521785	120V Li-ion Battery Charger
52179	783310521792	230V Li-ion Battery Charger
52180	783310521808	12V Li-ion Battery Charger
12274	783310122746	Carrying Strap



COPPER/ALUMINIUM CUTTER

PISTOL STYLE CABLE CUTTERS ESG50LX



ESG50LX



COPPER/ALUMINIUM CUTTER

SPECIFICATIONS

Length	15-3/4" (400 mm)
Width	3-1/8" (80 mm)
Height	13" (330 mm)
Weight	9.8 lb (4.4 kg)
Capacity	Cuts up to 2" diameter Copper (Cu)/ Aluminum (Al) Standard and Fine Stranded Cable

ESG50LX

CAT NO.	UPC NO.	DESCRIPTION
ESG50LX11	783310612421	50 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Battery
ESG50LX12	783310612438	50 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Battery
ESG50LX22	783310612445	50 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Battery
B ESG50LXB	783310611011	Cutter, 50 mm STD, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 05167	783310051671	18V 4.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap
A ESG50ES	783310041818	Blade, Cutting
R ESG50EF1	783310041849	Head, Cutting

PISTOL STYLE CABLE CUTTERS

ESC85LX, ESC105LX,
ESG105LX

- 350° rotating guillotine cutting head
- Dual position handles for easy operation and transport
- Single trigger operation
- Automatic retraction after completed cycle

SPECIFICATIONS

	ESC85LX	ESC105LX, ESG105LX
Length	21" (533 mm)	23-3/4" (604 mm)
Width	3-1/8" (80 mm)	3-1/8" (80 mm)
Height	13" (330 mm)	22 lb (9.9 kg)
Weight	15.2 lb (6.9 kg)	13" (330 mm)
Capacity	3.35" diameter (85 mm) Communications, Cu & Al Power Cables	4" diameter (105 mm) Communications, Cu & Al Power Cables

ESC85LX

CAT NO.	UPC NO.	DESCRIPTION
ESC85LX11	783310612759	85 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Batteries
ESC85LX12	783310612766	85 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Batteries
ESC85LX22	783310612773	85 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESC85LXB	783310612803	85 mm Soft Metal Cable Cutter, Bare Tool Only

ESC105LX – SCISSOR STYLE

CAT NO.	UPC NO.	DESCRIPTION
ESC105LX11	783310612636	105 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Batteries
ESC105LX12	783310612643	105 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Batteries
ESC105LX22	783310612650	105 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESC105LXB	783310612681	105 mm Soft Metal Cable Cutter, Bare Tool Only

ESG105LX – GUILLOTINE STYLE

CAT NO.	UPC NO.	DESCRIPTION
ESG105LX11	783310612513	105 mm Soft Metal Cable Cutter, 120V Charger, Two 4.0 Ah Batteries
ESG105LX12	783310612520	105 mm Soft Metal Cable Cutter, 12V Charger, Two 4.0 Ah Batteries
ESG105LX22	783310612537	105 mm Soft Metal Cable Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESG105LXB	783310612568	Cable Cutter, Li-ion, 105 mm STD, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 05167	783310051671	18V 4.0Ah Li-ion Battery
A 52177	783310521778	18V 2.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap
HE.10310	783310234920	Handle (ESC105LX, ESG105LX)



ESC85LX



ESC105LX



ESG105LX



COPPER/ALUMINIUM CUTTER

RATCHET STYLE CABLE CUTTER

ESR1000LX, ESR25LX

NEW



ESR1000LX

COPPER/ALUMINIUM CUTTER

NEW



ESR25LX

SPECIFICATIONS

	ESR1000LX	ESR25LX
Height	15" (380 mm)	15" (380 mm)
Width	4/5" (115 mm)	4/5" (115 mm)
Length	7.75" (197 mm)	7.75" (197 mm)
Weight	7.4 lb (3.35 kg)	7.4 lb (3.35 kg)
Capacity	1250 kcmil Cu / 1500 kcmil Al	ACSR: 636 kcmil (Grosbeak) (25 mm) Standard Guy Strand: 5/8" (16 mm)

ESR1000LX

	CAT NO.	UPC NO.	DESCRIPTION
N	ESR1000LX11	783310079552	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 120V Charger
N	ESR1000LX12	783310079569	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 12V Charger
N	ESR1000LX22	783310079576	Cu/Al Ratchet Cutter with two 18V 4.0Ah Batteries, 230V Charger
N B	ESR1000LXB	783310079545	Bare Tool Only – Cu/Al Ratchet Cutter

ESR25LX

	CAT NO.	UPC NO.	DESCRIPTION
N	ESR25LX11	783310079606	ACSR Ratchet Cutter, 120V Charger, Two 4.0Ah Batteries
N	ESR25LX12	783310079613	ACSR Ratchet Cutter, 12V Charger, Two 4.0Ah Batteries
N	ESR25LX22	783310079620	ACSR Ratchet Cutter, 230V Charger, Two 4.0Ah Batteries
N B	ESR25LXB	783310079590	Bare Tool Only – ACSR Ratchet Cutter

ACCESSORIES

	CAT NO.	UPC NO.	DESCRIPTION
A	52176	783310521761	18V 4.0Ah Li-ion Battery
A	52178	783310521785	120V Li-ion Battery Charger
A	52179	783310521792	230V Li-ion Battery Charger
A	52180	783310521808	12V Li-ion Battery Charger
A	12274	783310122746	Carrying Strap





Importação / Distribuição / Assistência Técnica

Nunes Oliveira

TEL.: (11) 3382-0600

www.nunesoliveira.com.br

diretoria@nunesoliveira



IN-LINE ACSR CUTTER ES20LX



ES20LX

SPECIFICATIONS

Height	15" (381 mm)
Width	2-7/8" (73 mm)
Weight	4.6 lb (2 kg)

CAPACITY

Max Diameter	3/4" diameter
ACSR	336.4 kcmil Merlin
Standard Guy Strand	3/8" diameter
Ground Rod	3/8" diameter
Rebar (SCH 60)	3/8" diameter
Soft Steel Bolts	3/8" diameter

ES20LX

CAT NO.	UPC NO.	DESCRIPTION
ES20LX11	783310612186	20 mm ACSR Cutter, 120V charger, Two 4.0Ah Batteries
ES20LX12	783310612193	20 mm ACSR Cutter, 12V charger, Two 4.0Ah Batteries
ES20LX22	783310612209	20 mm ACSR Cutter, 230V charger, Two 4.0Ah Batteries
B ES20LXB	783310612230	20 mm ACSR Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
R ES20E	783310055259	Blade Kit
A 52176	783310521761	18V 4.0Ah Li-ion Battery
A 52177	783310521778	18V 2.0Ah Li-Ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap



IN LINE ACSR CUTTERS

ESC25LX, ESG25LX

NEW



ESC25LX



SPECIFICATIONS

Width	3" (76 mm)
Height	18.5" (470 mm)
Weight	7 lb (3.17 kg)

CAPACITY

Cutter Head Opening	1" (25 mm)
ACSR	557 kcmil
Standard Guy Strand	1/2" (12 mm)
EHS Guy Strand	3/8" (10 mm)

ESC25LX – SCISSOR STYLE

CAT NO.	UPC NO.	DESCRIPTION
N ESC25LX11	783310084907	25 mm ACSR Cutter, 120V Charger, Two 4.0Ah Batteries
N ESC25LX12	783310084914	25 mm ACSR Cutter, 12V Charger, Two 4.0Ah Batteries
N ESC25LX22	783310084921	25 mm ACSR Cutter, 230V Charger, Two 4.0Ah Batteries
N B ESC25LXB	783310084938	25 mm ACSR Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52176	783310521761	18V 4.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap



ESG25LX

- Designed to cut ACSR, guy strand, and ground rod
- Guillotine style head
- Equipped with retraction stop to aid in time and battery savings
- Replaceable hardened blades for increased tool longevity

SPECIFICATIONS

Width	2-7/8" (73 mm)
Height	16.5" (419 mm)
Weight	5.8 lb (2.6 kg)

CAPACITY

Cutter Head Opening	1" (25 mm)
ACSR	636 kcmil
Standard Guy Strand	5/8" (16 mm)
EHS Guy Strand	7/16" (11 mm)

ESG25LX – GUILLOTINE STYLE

CAT NO.	UPC NO.	DESCRIPTION
ESG25LX11	783310612308	25 mm ACSR Cutter, 120V Charger, Two 4.0 Ah Batteries
ESG25LX12	783310612315	25 mm ACSR Cutter, 12V Charger, Two 4.0 Ah Batteries
ESG25LX22	783310612322	25 mm ACSR Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESG25LXB	783310612353	25 mm ACSR Cutter, Bare Tool Only



ACSR CUTTERS

ESG45LX, ESG55LX



ESG45LX



- Designed specifically to cut ACSR, guy strand and ground rods
- Retraction Stop allows the operator to stop the ram retraction at any point simply by tapping the trigger, and then starting the next cutting cycle from that point saving time and energy
- Two-stage hydraulic system provides fast advance and power speeds
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tools automatically retract when the cutting cycle is complete

SPECIFICATIONS

Width	4" (101 mm)
Height	20" (508 mm)
Weight	10 lb (4.5 kg)

CAPACITY

ACSR	1590 kcmil
Standard Guy Strand	5/8" diameter (16 mm)
EHS Guy Strand	1/2" diameter (13 mm)

ESG45LX

CAT NO.	UPC NO.	DESCRIPTION
ESG45LX11	783310612872	45 mm ACSR Cutter, 120V Charger, Two 4.0 Ah Batteries
ESG45LX12	783310612889	45 mm ACSR Cutter, 12V Charger, Two 4.0 Ah Batteries
ESG45LX22	783310612896	45 mm ACSR Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESG45LXB	783310612926	45 mm ACSR Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52176	783310521761	18V 4.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A 12274	783310122746	Carrying Strap



ESG55LX



- Lightweight and very easy to handle
- One trigger controls all tool functions
- Cutting head rotates 350°
- Tools automatically retract when the cutting cycle is complete

SPECIFICATIONS

Length	18-1/8" (460 mm)
Width	3-1/8" (80 mm)
Height	13-1/4" (337 mm)
Weight	17.5 lb (8 kg)

CAPACITY

ACSR	2515 kcmil
Standard Guy Strand	5/8" diameter (16 mm)
EHS Guy Strand	9/16" diameter (14 mm)

ESG55LX

CAT NO.	UPC NO.	DESCRIPTION
ESG55LX11	783310612995	55 mm ACSR Cutter, 120V Charger, Two 4.0 Ah Batteries
ESG55LX12	783310613008	55 mm ACSR Cutter, 12V Charger, Two 4.0 Ah Batteries
ESG55LX22	783310613015	55 mm ACSR Cutter, 230V Charger, Two 4.0 Ah Batteries
B ESG55LXB	783310613046	55 mm ACSR Cutter, Bare Tool Only

IN LINE BOLT CUTTERS ETS8LX



ETS8LX



SPECIFICATIONS

Weight	3.3 lb (1.5 kg)
Length	12-1/8" (308 mm)
Battery	18V 2.0Ah Li ion

MATERIAL	DIAMETER				
	1/16"	1/8"	3/16"	1/4"	5/16"
Cable Tray (Mild steel, Zinc Plated)	X	X	X	X	X
Cable Tray (Stainless Steel)	X	X	X	X	
Threaded Rods	X	X	X	X	X
Threaded Rods, Stainless Steel	X	X	X	X	X
Steel Bolts (Grade 2)	X	X	X	X	X
Steel Bolts (Grade 8)	X	X	X	-	-

ETS8LX

CAT NO.	UPC NO.	DESCRIPTION
ETS8LX11	783310611707	8 mm Bolt Cutter, 120V Charger, Two 2.0 Ah Batteries
ETS8LX12	783310611714	8 mm Bolt Cutter, 12V Charger, Two 2.0 Ah Batteries
ETS8LX22	783310611721	8 mm Bolt Cutter, 230V Charger, Two 2.0 Ah Batteries
B ETS8LXB	783310611752	8 mm Bolt Cutter, Bare Tool Only

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52177	783310521778	18V 2.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
R HB.9856	783310199878	Cutting Head

IN LINE BOLT CUTTERS ETS12LX



ETS12LX



- In-line tool style is light weight and very easy to control
- One trigger controls all tool functions
- Tools automatically retract when the cutting cycle is complete

SPECIFICATIONS

Height	13-5/8" (365 mm)
Width	2-7/8" (73 mm)
Weight	4.4 lb (2.0 kg)

CUTTING CAPACITY

Common Bolt	1/2" diameter
Grade 5 Bolt	7/16" diameter
Grade 8 Bolt	5/16" diameter
Threaded Rod	1/2" diameter
One-Time Disposable Lock	4 AWG Alumoweld
Boa Lock	BL 9
Grade 40 Rebar	3/8" diameter
Steel Rod	3/8" diameter (1/2" diameter using two cycles)
Ground Rod	3/8" diameter (1/2" diameter using two cycles)
Copper and Aluminum Cable	2/0 AWG
ACSR	3/0 AWG Pigeon (4/0 AWG Pigeon using two cycles)
Guy Strand	5/16" diameter (3/8" diameter using two cycles)
EHS Guy Strand	5/16" diameter
Aircraft Cable	1/4" diameter

ETS12LX

CAT NO.	UPC NO.	DESCRIPTION
ETS12LX11	783310611820	8 mm Bolt Cutter, 120V Charger, Two 2.0 Ah Batteries
ETS12LX12	783310611837	8 mm Bolt Cutter, 12V Charger, Two 2.0 Ah Batteries
ETS12LX22	783310611844	8 mm Bolt Cutter, 230V Charger, Two 2.0 Ah Batteries
ETS12LXB	783310611875	8 mm Bolt Cutter, Bare Tool Only
HB.9864	783310562887	Blade Set (ETS12LX)

ACSR, GUY STRAND & STEEL CUTTING

SELECTION GUIDE FOR ACSR, GUY STRAND & STEEL CUTTERS

	ACSR	STD. GUY STRAND	EHS GUY STRAND	GROUND ROD	REBAR (SCHEDULE 60)
BATTERY POWERED					
ES20	336.4 kcmil (Merlin)	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)	
ESC25	557 kcmil	1/2" (12 mm)	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)
ESG25	636 kcmil	5/8" (16 mm)	7/16" (11 mm)	3/8" (9 mm)	3/8" (9 mm)
ESG45	1590.0 kcmil	5/8" (16 mm)	1/2" (13 mm)	5/8" (16 mm) dia.	1/2" (13 mm)
ESG55	2515 kcmil (Joree 76/19)	5/8" (16 mm)	9/16" (14 mm)	3/4" (19 mm)	5/8" (16 mm)

COPPER AND ALUMINUM CUTTING

SELECTION GUIDE FOR COPPER & ALUMINUM CABLE CUTTERS

CABLE SIZE

	AWG	#8	#6	#4	#2	#1	1/0	2/0	3/0	4/0	250 KCMIL	300 KCMIL	350 KCMIL	400 KCMIL	500 KCMIL	600 KCMIL	750 KCMIL	1000 KCMIL	1500 KCMIL	2000 KCMIL
	mm	6	10	16	25	35	40	50	70	95	120	150	150	185	240	300	400	500	800	1000

BATTERY POWERED

ES32	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
ESC35	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-	-
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-	-
ESC50	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ESG50	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ESC85	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ESC105 ESG105	Al	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Cu	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

10K PSI PUMP

EHP700L



EHP700L



- Capable of powering any high-pressure hydraulic remote head
- Equipped with Intelli CRIMP® technology to monitor crimping force
- Retraction Stop Repeat (RSR) allows users to teach pump where to start and stop each cycle
- Real-time LED readout permits user to visually monitor pressure cycle
- Job specific crimp, cut, and punch settings
- Mode dial allows for pump to learn new operating cycles
- Dual battery ports – 1 active/1 stored

SPECIFICATIONS

Length	14" (356 mm)
Width	6-1/2" (165 mm)
Height	11-1/2" (292 mm)
Weight	14.1 lb (6.4 kg)
Operating Pressure	10,000 psi (700 bar)

EHP700L

CAT NO.	UPC NO.	DESCRIPTION
EHP700L11	783310007357	Power Pump, Li-ion, STD, 120V
EHP700L12	783310007647	Power Pump, Li-ion, STD, 12V
EHP700L22	783310007654	Power Pump, Li-ion, STD, 230V
EHP700L120	783310007661	Power Pump, Li-ion, STD, 120V AC
EHP700L230	783310007678	Power Pump, Li-ion, STD, 230V AC
B EHP700LB	783310011514	Power Pump, Li-ion, STD, Bare

ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
A 52176	783310521761	18V 3.0Ah Li-ion Battery
A 52178	783310521785	120V Li-ion Battery Charger
A 52179	783310521792	230V Li-ion Battery Charger
A 52180	783310521808	12V Li-ion Battery Charger
A TG3	783310010548	Strap
A 25766	783310257660	Adapter, Charger 18V Li-ion to 12V Ni
A EAC18120	783310521914	Adapter, AC – 230V to 18V
A HTA4GL	783310007593	Remote Control
R EL122/32	783310020424	Hydraulic Fluid, Biodegradable
R 17707	783310177074	Hose Assembly, 1/4" X 10' 3/8M & 1/4M Filled
R 05850	783310058502	Hose Assembly, 1/4" X 10' 3/8M & 3/8F Filled
R 01058	783310010586	Hose Assembly, 1/4" X 6' 3/8M & 1/4M Filled
R 01059	783310010593	Hose Assembly, 1/4" X 6' 3/8M & 3/8F Filled

Importação / Distribuição

Nunes Oliveira
Máquinas e Ferramentas para Saneamento,
Indústria, Construção, Óleo e Gás

TEL.: (11) 3382-0600

www.nunesoliveira.com.br
contato@nunesoliveira.com.br

Rua do Bosque, 383/387 - Cep 01136-000
Barra Funda - São Paulo - SP

FABRICANTE:



GREENLEE